

# A40

## Player

---

Specification v1.0



## Overview

A40 is a new generation of asynchronous and synchronous LED players that support synchronous display and asynchronous playback.

A40 supports the arbitrary arrangement of programs in multiple windows and the playback of various programs such as videos, pictures, texts, tables, clocks, streaming media, web pages and weather. It is also available for editing and publishing program by PlayerMaster.

A40 supports Wi-Fi hotspots connection and it is designed for program management and parameter settings for mobile phones, pads, computers and other devices. A40 supports LAN scheduling and it can automatically adjust the brightness with the light sensor (optional) to meet the needs of brightness adjustment in various occasions.

It supports plug-and-play and can also perform program update and management through the wired network. As a brand-new playback control system, A40 has significant advantages in advertising screens, display screens and other fields.

## Features

### New breakthrough

- Synchronous input or asynchronous playback and settings of synchronous and asynchronous priority.
- 1×Gigabit Ethernet output. Loading capacity of the overall unit is 650,000 pixels with maximum pixel dimensions of 4096×2560. It supports screen zoom display of synchronous input.
- 1×HDMI1.4 input.
- 4G module (optional).
- Audio output.
- Installed 32G memory of which 28G is available for users; support playback via USB.
- Fully compatible with program management and display configuration of conventional synchronous control system.

## Intelligent control, convenient management

- U-disk plug-and-play.
- Multi-screen synchronous playback (NTP synchronization).
- LAN program scheduling and command scheduling.
- Enable temperature, humidity, brightness, and other parameter monitoring in the operating environment, with automatic display screen brightness adjustment (sensors sold separately).
- Connect to the network via LAN/WiFi/4G/5G for remote control and management.

## Program management, easy to operate

- Use PlayerMaster for program editing with comprehensive functions and convenient operation.
- Multi-window and window size and position can be set freely with window overlay.
- Rich media materials, such as pictures, videos, texts, tables, clocks, streaming media, web pages and weather, etc.
- Multi-page playback.

## Specifications

| Basic Parameters       |                                                                                                                                                                                                                                                                    |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Memory                 | 32GB (28GB available)                                                                                                                                                                                                                                              |
| Loading capacity       | The loading capacity of the overall unit is 650,000 pixels with maximum pixel dimensions of 4096×2560.                                                                                                                                                             |
| Supported receiver     | All series of Colorlight receivers                                                                                                                                                                                                                                 |
| Media Format           |                                                                                                                                                                                                                                                                    |
| Program classification | Support the program window classification, arbitrary overlay and multi-page playback                                                                                                                                                                               |
| Video format           | HEVC(H.265), H.264, H263, MVC, MPEG-4, MPEG-1/2, GOOGLE VP8, GOOGLE VP9, VC-1, MOTION JPEG                                                                                                                                                                         |
| Audio format           | AAC-LC, HE-AAC, HE-AAC V2, MP3, Linear PCM.                                                                                                                                                                                                                        |
| Image format           | Bmp, jpg, png, gif, webp, etc.                                                                                                                                                                                                                                     |
| Text format            | Txt, rtf, word, ppt, excel through software on PC.                                                                                                                                                                                                                 |
| Text display           | Support single-line text, multi-line text for static and dynamic display.                                                                                                                                                                                          |
| Multi-window display   | Support 2× 1080P video window or up to 4× 720P video windows, multiple graphics and texts, rolling subtitles, rolling pictures, LOGO, date and time, weather forecast. Provide the function of free screen split and display different content in different areas. |
| Window overlapping     | Arbitrary overlay of windows with transparent, opaque and other effects.                                                                                                                                                                                           |

|                                                  |                                                                                                                                                                                               |
|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RTC                                              | Real time clock display and management.                                                                                                                                                       |
| <b>Terminal management and automatic control</b> |                                                                                                                                                                                               |
| Connection                                       | LAN/WiFi/4G/5G                                                                                                                                                                                |
| Program update methods                           | U-disk plug-and-play, Network management and publishing, USB cable directly connect for release.                                                                                              |
| Manage devices                                   | Smart terminals such as PC, Android, iOS, etc.                                                                                                                                                |
| Wireless control                                 | Brightness real-time adjustment, synchronous and asynchronous switching, turn on / off LED display, system parameters configuration, program playback control, wireless program transmission. |
| Automatic brightness adjustment                  | Automatic adjustment of screen brightness according to fixed time or according to ambient brightness (sensors need to be purchased separately).                                               |
| LAN scheduling                                   | Support the programs playback mode of inter-cut and rotation, timed brightness adjustment, timed sleep, wake-up, restart, etc.                                                                |
| Management software                              | PlayerMaster, LED Assistant.                                                                                                                                                                  |

## Hardware


### Front panel



| No. | Name             | Function                                                                                                      |
|-----|------------------|---------------------------------------------------------------------------------------------------------------|
| 1   | 4G               | 4G antenna interface, connect to 4G antenna.                                                                  |
| 2   | ASYNC SYNC       | Synchronous and asynchronous switch indicator, ASYNC (asynchronous indicator), SYNC (synchronized indicator). |
| 3   | INPUT SWITCH     | Synchronous and asynchronous switch buttons.                                                                  |
| 4   | SIM              | SIM slot                                                                                                      |
| 5   | USB <sup>1</sup> | USB-A 3.0 interface, support external U disk or USB camera connection.                                        |
| 6   | Wi-Fi            | External Wi-Fi antenna to provide frequently used Wi-Fi hotspot, or connect to other Wi-Fi routers.           |

<sup>1</sup> USB 3.0 Output: 5V 1A.

## Rear panel

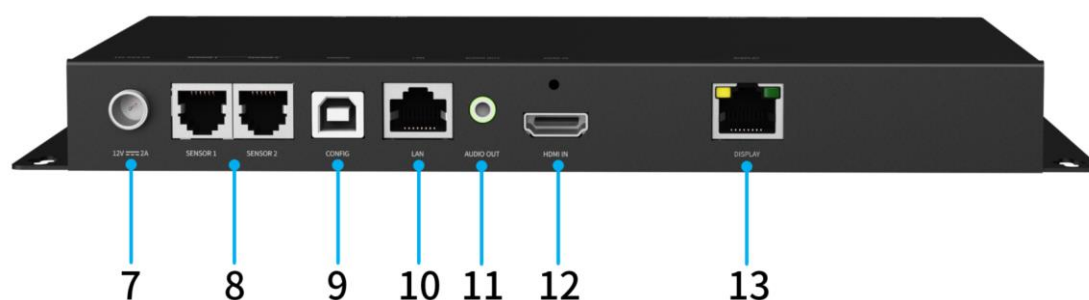

| No. | Name       | Function                                                                                                                                                                                                                                                               |
|-----|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | 12V=2A     | DC 12V power input.                                                                                                                                                                                                                                                    |
| 8   | SENSOR 1/2 | RJ11 interface which is used to connect the sensor to automatically adjust the brightness of the display screen; monitor and display parameters such as ambient brightness, smoke, temperature and humidity and air quality (sensors need to be purchased separately). |
| 9   | CONFIG     | USB-B interface for used to connecting to a PC for configuration and debugging of the LED player.                                                                                                                                                                      |
| 10  | LAN        | Fast Ethernet port for accessing to LAN.                                                                                                                                                                                                                               |
| 11  | AUDIO OUT  | Support 1/8" (3.5mm) TRS output, output HiFi stereo.                                                                                                                                                                                                                   |
| 12  | HDMI IN    | HDMI1.4 input interface with HDMI synchronization signal input.                                                                                                                                                                                                        |
| 13  | DISPLAY    | Network port of gigabit signal output which is connected to the receiver of LED display.                                                                                                                                                                               |


## Physical Parameters

| Dimensions (W×H×D)       |                                     |
|--------------------------|-------------------------------------|
| Unboxed                  | 256.4mm×137.4mm×26.2mm (no antenna) |
| Net weight               | 0.88kg                              |
| Electrical specification |                                     |
| Power input              | DC12V, 2A                           |
| Rated power              | 9W                                  |
| Operating environment    |                                     |
| Temperature              | -20°C~65°C (-4°F~149°F)             |
| Humidity                 | 0-95%, non-condensing               |


## Reference Dimensions

Unit: mm

### A40 LED Player

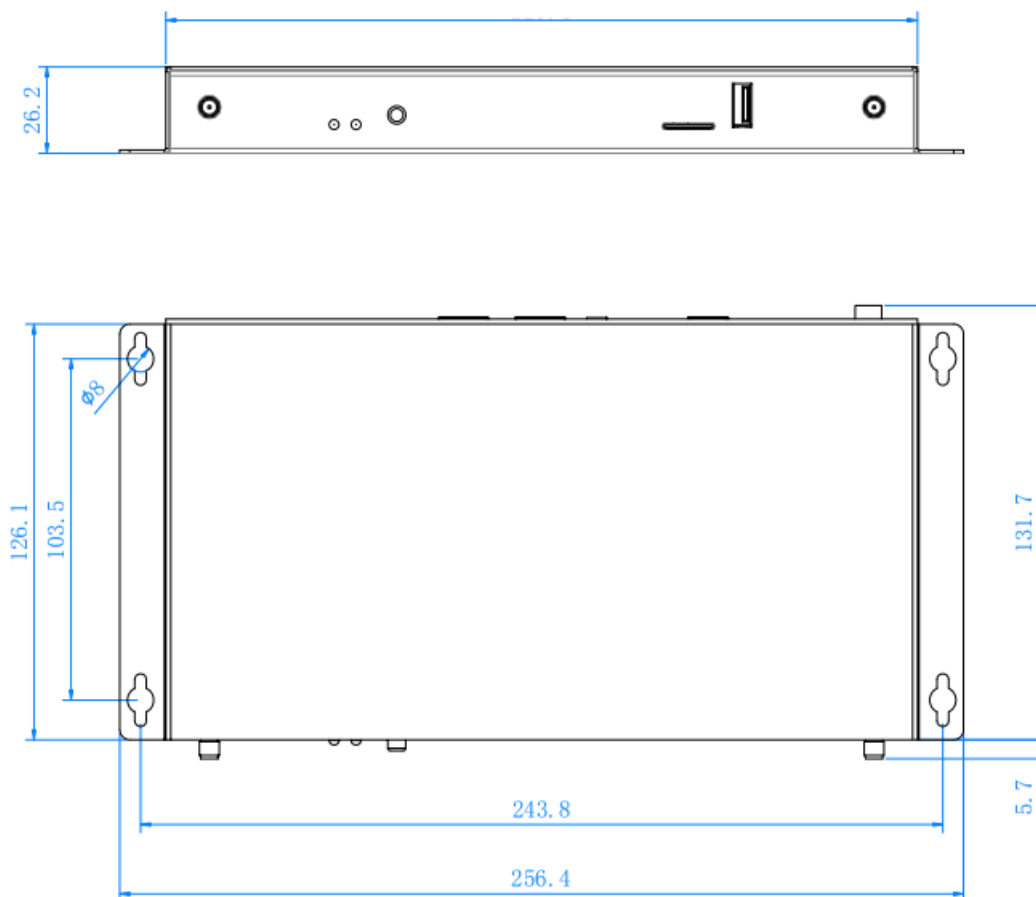

### WiFi antenna

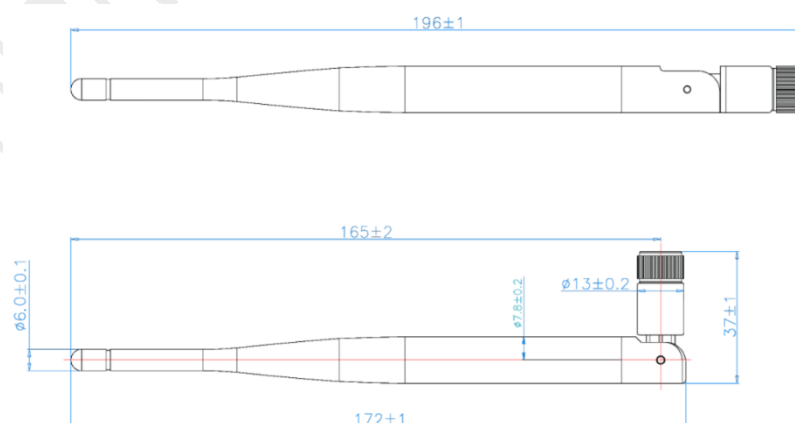

\* Dimensions and weight may vary depending on different configuration and manufacturing process.

## software

| Name          | Type          | Description                                                                                    |
|---------------|---------------|------------------------------------------------------------------------------------------------|
| PlayerMaster  | PC Client     | Supports program editing and publishing.                                                       |
| LED Assistant | Mobile Client | Supports Android and iOS systems and realization of wireless control of the playback terminal. |

## Statement

Copyright © 2024 Colorlight Cloud Tech Ltd. . All rights reserved.

Without the express written permission of Colorlight Cloud Tech Ltd., no unit or individual may copy, copy, transcribe or translate part or all of the contents of this book. Not to be used for any commercial or profit-making purposes in any form or by any means.

 The logo is a registered trademark of Colorlight Cloud Tech Ltd.

Without the written permission of the company or the trademark owner, no unit or individual may in any way or for any reason use, reproduce, modify, disseminate, transcribe or infringe all or any part of the above-mentioned trademark, nor may it be bundled with other products. Use sales.

As factors such as product batches and production processes may change, in order to provide accurate product information, specification parameters, and product characteristics in order to match the actual product, the text description and picture effects in the document will be adjusted and revised appropriately. If it is necessary to carry out the above modification and adjustment without prior notice, please refer to the actual product.

Welcome to choose to use the products of Colorlight Cloud Tech Ltd. If you have any questions or suggestions in use, please contact us through official channels, we will try our best to support and listen to your valuable suggestions. For more information and updates, please visit the official website [www.colorlightinside.com](http://www.colorlightinside.com) or scan the QR code.

Service Phone

**4008 770 775**

**Colorlight Cloud Tech Ltd.**

Official Website: [www.colorlightinside.com](http://www.colorlightinside.com)  
Head Office Address: Room 37F-39F, Building 8, Zone A,  
Shenzhen International Innovation Valley, Vanke Cloud City, Dashi Yilu,  
Nanshan District, Shenzhen, China

